



■ Features :

- Constant current mode power supply
- Universal AC input / Full range
- Withstand 300VAC Surge input for 5 seconds
- Protections: Short circuit / Over voltage
- Fully isolated plastic case
- Small and compact size
- Cooling by free air convection
- IP42 design
- 100% full load burn-in test
- Suitable for LED related fixture or appliance (such as LED Decoration or Advertisement devices)(Note.6)
- Low cost / High reliability
- 2 years warranty

User's Manual



Click Me

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>


IS 15885 (Part 2 Sec1.3)



(except for APC-25-350)



(only for APC-25-500)



(only for APC-25-700&1050)




SPECIFICATION


MODEL		APC-25-350		APC-25-500		APC-25-700		APC-25-1050	
OUTPUT	RATED CURRENT	350mA		500mA		700mA		1050mA	
	DC VOLTAGE RANGE	25~70V		15~50V		11~36V		9~24V	
	RATED POWER	24.5W		25.2W		25.2W		25.2W	
	CURRENT RIPPLE	5.0%							
	CURRENT ACCURACY	±8.0%							
	SETUP, RISE TIME	1500ms, 30ms / 230VAC		1500ms, 30ms / 115VAC at full load					
	HOLD UP TIME (Typ.)	20ms/230VAC		12ms/115VAC at full load					
INPUT	VOLTAGE RANGE	Note.2	90 ~ 264VAC	127 ~ 370VDC					
	FREQUENCY RANGE		47 ~ 63Hz						
	EFFICIENCY(Typ.)		83%	83%		83%		83%	
	AC CURRENT		0.4A/230VAC;0.8A/115VAC						
	INRUSH CURRENT(Typ.)		COLD START 45A(twidth=310μs measured at 50% Ipeak) at 230VAC						
	MAX. No. of PSUs on 16A CIRCUIT BREAKER		9 units (circuit breaker of type B) / 15 units (circuit breaker of type C) at 230VAC						
	LEAKAGE CURRENT		0.25mA / 240VAC						
PROTECTION	OVER VOLTAGE		76 ~ 94V	55 ~ 68V		41 ~ 49V		27 ~ 35V	
			Protection type : Shut down o/p voltage, re-power on to recover						
ENVIRONMENT	WORKING TEMP.		-30 ~ 70℃ (Refer to "Derating Curve")						
	WORKING HUMIDITY		20 ~ 90% RH non-condensing						
	STORAGE TEMP., HUMIDITY		-40 ~ +80℃, 10 ~ 95% RH						
	TEMP. COEFFICIENT		±0.2%/℃ (0 ~ 50℃)						
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes						
SAFETY & EMC (Note 5)	SAFETY STANDARDS		UL8750 (except for APC-25-350), CSA-C22.2 No. 250.0-13 (only for APC-25-700&1050), BIS IS15885(except for APC-25-350), EAC TP TC 004,IP42, BS EN/EN 62368-1 approved						
	WITHSTAND VOLTAGE		I/P-O/P:3KVAC						
	ISOLATION RESISTANCE		I/P-O/P:>100M Ohms / 500VDC / 25℃ / 70% RH						
	EMC EMISSION		Compliance to BS EN/EN55032,BS EN/EN61000-3-2 Class A,BS EN/EN61000-3-3, EAC TP TC 020						
	EMC IMMUNITY		Compliance to BS EN/EN55035,BS EN/EN61000-4-2,3,4,5,6,8,11; light industry level(surge 2KV), EAC TP TC 020						
OTHERS	MTBF		4955.9K hrs min. Telcordia SR-332 (Bellcore); 504.9K hrs min. MIL-HDBK-217F (25℃)						
	DIMENSION		84*57*29.5(L*W*H)						
	PACKING		0.13Kg; 72pcs/10.4Kg/0.92CUFT						
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Derating may be needed under low input voltage. Please check the static characteristic for more details. 3. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) 4. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). 5. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf 6. This product is not intended for LED lighting luminaire applications in the EU and China.(In the EU and China the LPF/NPF/XLG/XLC/XLN series are recommended.) ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx								

Mechanical Specification


Case No.PCD16A Unit:mm Tolerance:±1

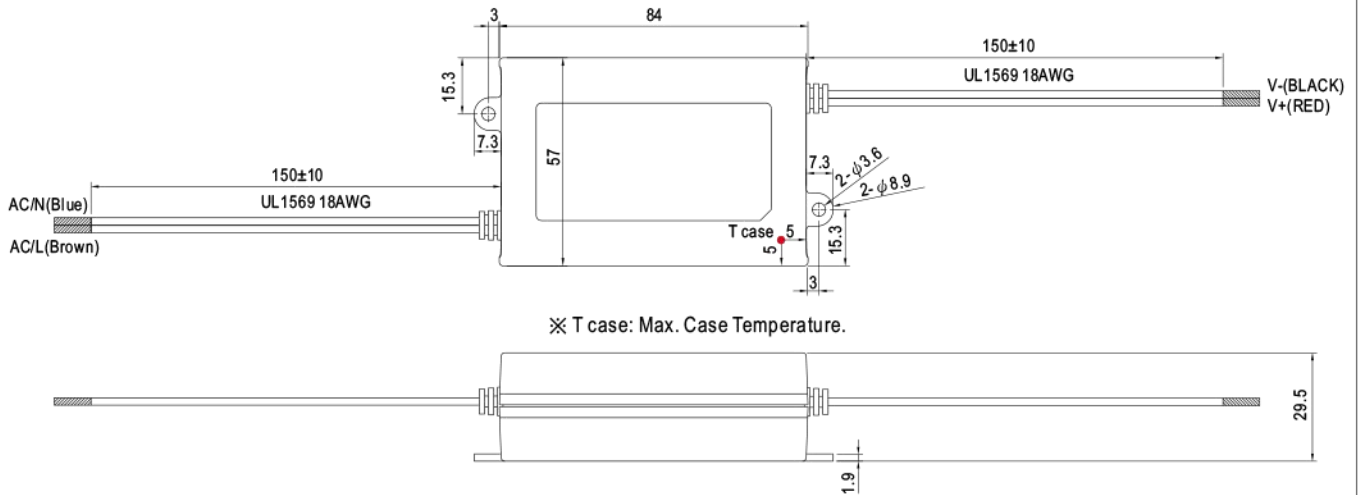

Block Diagram

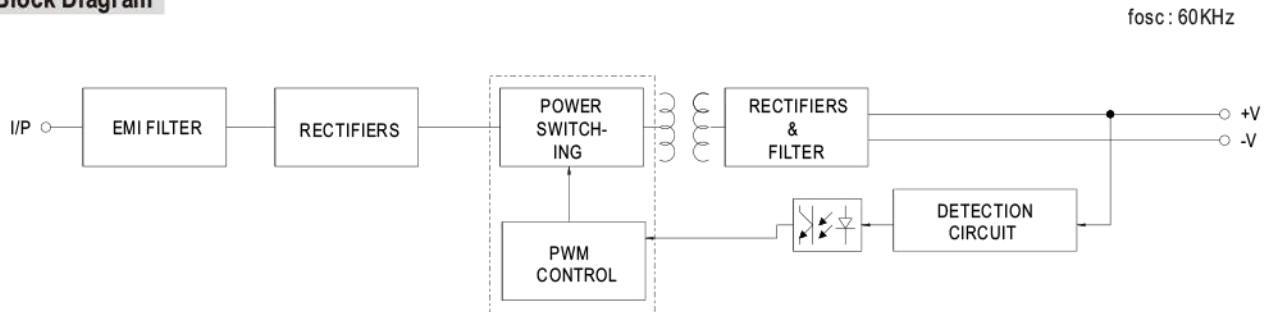

Derating Curve

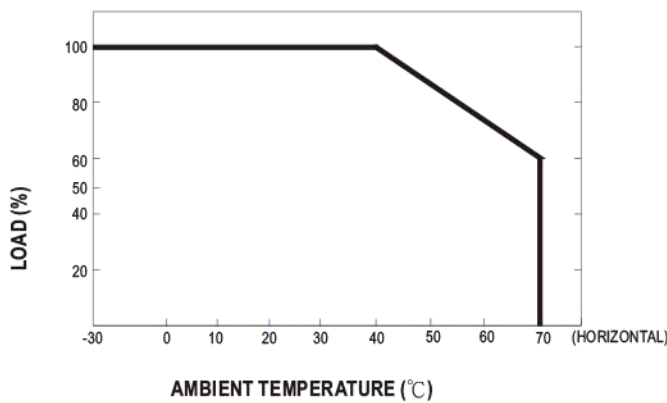

Static Characteristics

