500W True Sine Wave DC-AC Inverter with MPPT Solar Charger ISI-501 series



Input



AC Output



User's Manual
Click Me

TPTC004 IEC62368-1

Marine Car Use Household

Features

- True sine wave output (THD<3%)
- High surge power up to 1000W
- High efficiency up to 88%
- High frequency design
- Thermostatically controlled cooling fan
- Protections: Bat. low alarm / Bat. low shutdown / Over voltage / Over temp. / Output short / Input polarity reverse / Overload
- Built-in 500W MPPT solar charger, MPPT efficiency:98%(Typ.)
- Built-in remote ON-OFF control
- Built-in battery low relay contact
- LED indicator for operation status and battery capacity
- 3 years warranty

Applications

- Home appliance
- Power tools
- Portable equipment
- Yacht
- Vehicle

GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

ISI-501 series integrates a DC/AC True Sine Wave Inverter and a MPPT charger. This series is a high performance true sine wave DC/AC inverter which converts the DC electricity from a system consisting of batteries and solar panels. ISI-501 is not only a high frequency designed inverter but also fully digitally controlled by an advanced microprocessor. With true sine wave output, ISI-501 series can provide 500W continuously, 550W for 60 seconds, and 1000W for 30 AC-cycles. This series incorporates a MPPT solar charger, including the constant current and constant voltage charging characteristics.






Model Encoding

ISI - 501 - 112 - A

- Series Name: ISI
- Output Wattage: 501
- AC Output Voltage: 1:110VAC, 2:230VAC
- Bat. Voltage: 12:12VDC, 24:24VDC, 48:48VDC
- AC Output Receptacle: A :TYPE A OUTLET, B :TYPE B OUTLET, C :TYPE C OUTLET, D :TYPE D OUTLET, F :TYPE F OUTLET, U :TYPE U OUTLET

500W True Sine Wave DC-AC Inverter with MPPT Solar Charger ISI-501 series


■ AC Output Receptacles(Optional)

Receptacle type						
	TYPE-A	TYPE-B	TYPE-C	TYPE-D	TYPE-F	TYPE-U
	Standard	Standard	Optional	Optional	Optional	Optional
Country	USA	EUROPE	AUSTRALIA	U.K	GFCI (60Hz)	UNIVERSAL
Certificate	FC	CE	CE	CE	FC	None


SPECIFICATION

MODEL			ISI-501-112□	ISI-501-124□	ISI-501-148□	ISI-501-212□	ISI-501-224□	ISI-501-248□
INVERTER SECTION	OUTPUT	RATED POWER	450W	500W		450W	500W	
		MAXIMUM OUTPUT POWER (Typ.)	550W for 60 sec. / surge power 1000W for 30 cycles (112, 212 models : 495W for 60 sec. / surge power 900W for 30 cycles)					
		AC VOLTAGE	Factory setting set at 110VAC			Factory setting set at 230VAC		
			100 / 110 / 115 / 120VAC selectable by setting button S.W			200 / 220 / 230 / 240VAC selectable by setting button S.W		
		FREQUENCY Note.9	Factory setting set at 110VAC			Factory setting set at 230VAC		
			60±0.1Hz 50/60Hz selectable by setting button S.W			50±0.1Hz 50/60Hz selectable by setting button S.W		
		WAVEFORM Note.1	True sine wave (THD<3%)					
		AC REGULATION (Typ.)	±3%					
		FRONT PANEL INDICATOR	Fault and operation status, Charger status, Battery capacity					
	INPUT	BAT. VOLTAGE	12V	24V	48V	12V	24V	48V
		VOLTAGE RANGE Note.3,5	10.5 ~ 15VDC	21 ~ 30VDC	42 ~ 60VDC	10.5 ~ 15VDC	21 ~ 30VDC	42 ~ 60VDC
		DC CURRENT (Typ.) Note.7	50A	30A	15A	50A	30A	15A
		NO LOAD CURRENT DRAW (Typ.)	1.25A	0.63A	0.32A	1.25A	0.63A	0.32A
		OFF MODE CURRENT DRAW (Typ.)	≦1mA					
		EFFICIENCY (Typ.) Note.2	85%	87%	87%	86%	88%	88%
	OUTPUT PROTECTION	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover					
		OUTPUT SHORT	Shut down o/p voltage, re-power on to recover					
		OVER LOAD (Typ.)	110% load for 60 sec.					
			Protection type : Shut down o/p voltage, re-power on to recover					
BATTERY SECTION		CHARGER CURRENT (Typ.)	30A	17A	8.5A	30A	17A	8.5A
		BATTERY TYPE	Open & sealed Lead Acid					
		FUSE	40A*2	40A*1	20A*1	40A*2	40A*1	20A*2
		BAT. LOW ALARM Note.3	11.3V	22.5V	45V	11.3V	22.5V	45V
		BAT. LOW SHUTDOWN Note.3	10.5V	21V	42V	10.5V	21V	42V
		REVERSE POLARITY	By internal fuse open					
MPPT / SOLAR SECTION		MPPT CHARGER EFFICIENCY (Typ.)	98%					
		OPEN CIRCUIT VOLTAGE RANGE	35 ~ 50V	45 ~ 90V	90 ~ 160V	35 ~ 50V	45 ~ 90V	90 ~ 160V
		MPPT RANGE	25 ~ 50V	35 ~ 90V	70 ~ 160V	25 ~ 50V	35 ~ 90V	70 ~ 160V
		SOLAR INPUT CURRENT (Typ.)	11A	7A	4.5A	11A	7A	4.5A
		SOLAR INPUT POWER (Typ.)	500W					
GENERAL SECTION	ENVIRONMENT	WORKING TEMP. Note.4	-20 ~ +40℃ @ 100% load ; 60℃ @ 50% load					
		WORKING HUMIDITY	20% ~ 90% RH non-condensing					
		STORAGE TEMP., HUMIDITY	-30 ~ +70℃ / -22 ~ +158℉, 10 ~ 95% RH non-condensing					
		VIBRATION	10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes					
	SAFETY & EMC	SAFETY STANDARDS	IEC62368-1 CB, EAC TP TC 004 approved; Meet BS EN/EN62368-1					
		WITHSTAND VOLTAGE	Bat I/P - AC O/P:3.0KVAC AC O/P - FG:1.5KVAC					
		ISOLATION RESISTANCE	Bat I/P - AC O/P, Bat I/P - FG, AC O/P - FG: 100M ohms / 500VDC / 25℃/ 70% RH					
		EMC EMISSION	Compliance to FCC part 15 class B, EAC TP TC 020			Compliance to BS EN/EN55032 class B, EAC TP TC 020		
		EMC IMMUNITY	Compliance to EAC TP TC 020			Compliance to BS EN/EN61000-4-2,3,8, BS EN/EN55035, EAC TP TC 020		
	OTHERS	MTBF	565.4K hrs min. Telcordia SR-332 (Bellcore) ; 57.8K hrs min. MIL-HDBK-217F (25℃)					
		DIMENSION	205*158*67mm (L*W*H)					
		PACKING	2.35Kg; 6pcs/15.1Kg/1.55CUFT					
NOTE			1.THD is tested by rated power, linear load at 13V,26V,52V input voltage. 2.Efficiency is tested by 350W, linear load at 13V,26V,52V input voltage. 3.The tolerance of each voltage value by models is : 112/212→±0.5V ; 124/224→±1V ; 148/248→±2V. 4.Output derating capacity referenced by curve 1. 5.Input derating capacity referenced by curve 2. 6.All parameters not specified above are measured at rated load, 25℃ of ambient temperature and set to factory setting. 7.DC current is tested by 500W, linear load at 12V,24V,48V input voltage. 8.The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). 9.Type F for 60Hz only.					


■ Block Diagram

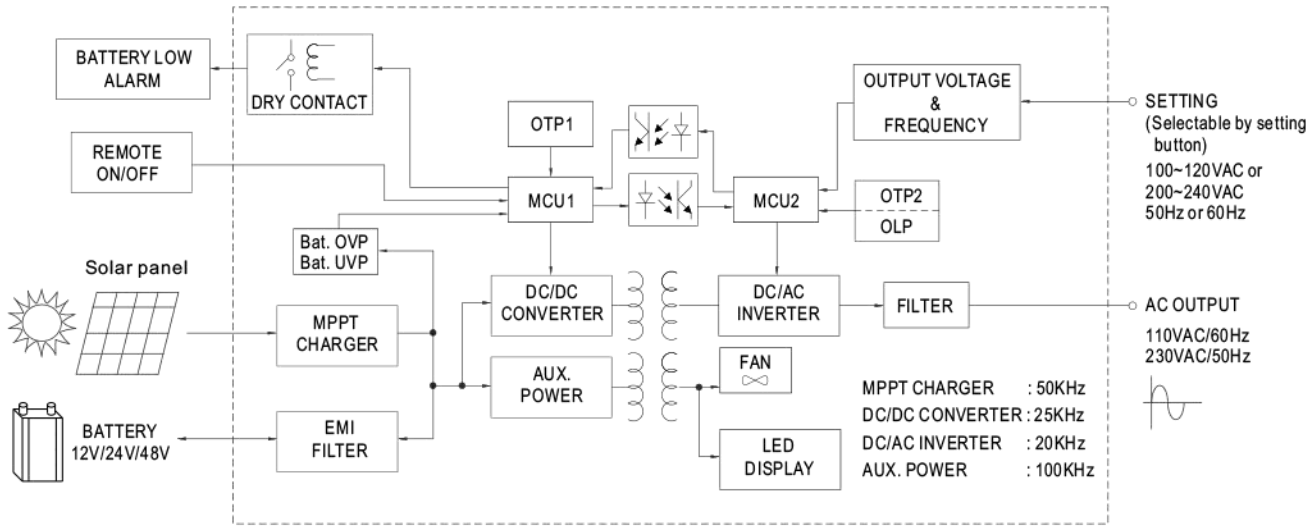

■ Derating Curve

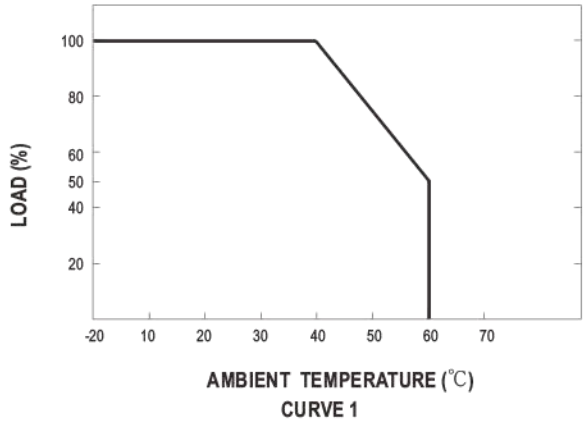


CURVE 1

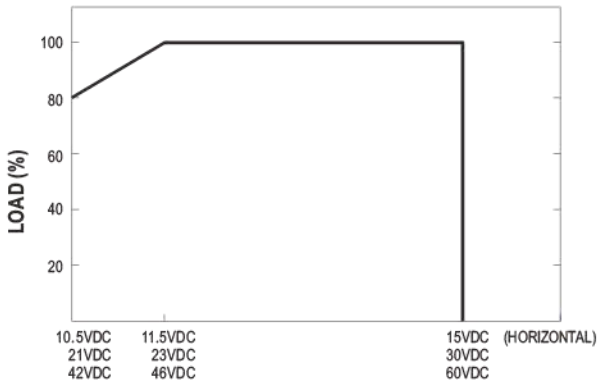

CURVE 2

■ Charging Curve

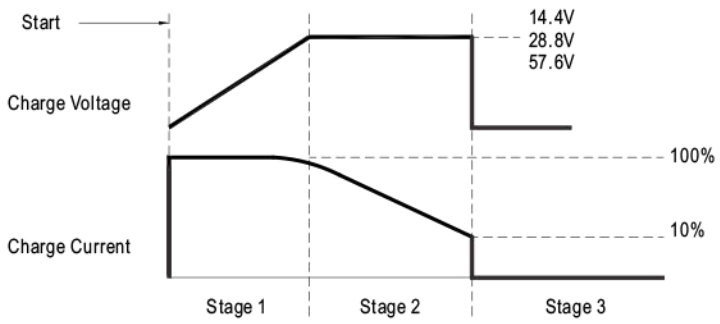

Stage 1 : Constant Current
Stage 2 : Constant Voltage
Stage 3 : MPPT Charger OFF


*Constant current condition : Dependent on solar input current and MPPT voltage of solar panel.
*MPPT charger OFF condition: Charge current less than 10% rated charge current and solar input power under 50W.


■ Mechanical Specification


(Unit: mm , tolerance ±0.5mm) Case No.805

Input Terminal Pin No. Assignment


Pin No.	Assignment	Pin No.	Assignment
1	Battery Input NEG(-)	5	FG ⏚
2	Battery Input POS(+)	6	Bat. Low Alarm Connector
3	Solar Input NEGC(-)	7	Remote ON/OFF Connector
4	Solar Input POS(+)		

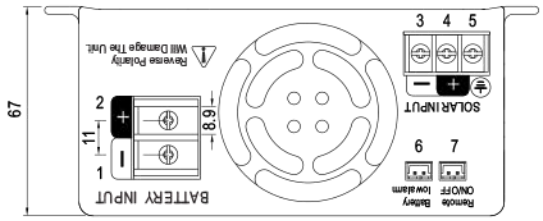

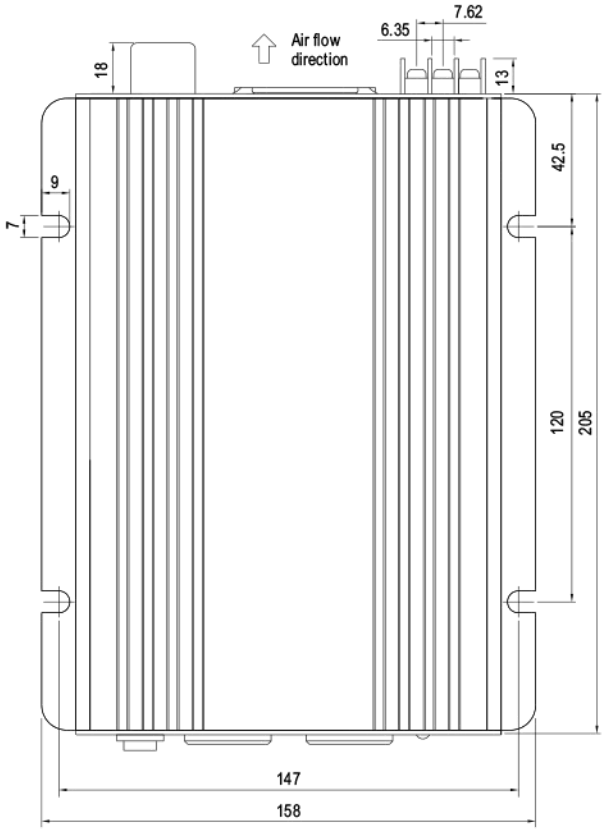

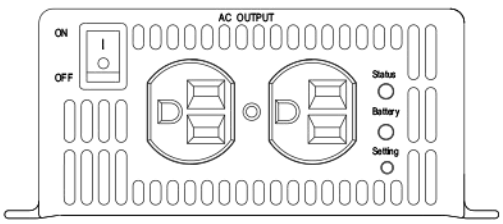


Type-A

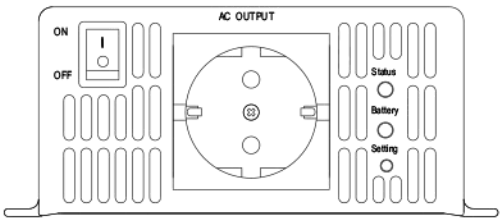

Type-B


■ Function Manual



Remote ON/OFF Connector

Remote ON/OFF Connector :
JST B-XH or equivalent

Open	Normal work
Short	Remote off



Contact Rating :
1A @ 24VDC resistive

Bat. Low Alarm Connector

Bat. Low Alarm Connector :
JST B-XH or equivalent

Open	Battery low
Short	Battery OK